



CMA-180-VL TALL

High Temperature
3- Door Single Rack
Dishwasher

New
"Ventless"
Heat
Recovery and
Condensation
Removal
Option



Features:

- **Replaces need for independent vent hood.**
- Final rinse valve receives cold water (45-70°F) that is processed through "heat recovery system", providing nearly cost free heating capabilities for water supplied to the booster heater, which reduces the recovery time for the booster heater.
- Heat recovery system captures water vapor from the wash & rinse cycle, and condenses it to heat the incoming cold water & evacuate the steam from the wash chamber.
- Door-actuated start.
- Safe-T-Temp feature assures 180°F sanitizing rinse every cycle.
- 12kW electrical booster heater.
- Booster-safety thermostat.
- 6kW wash tank heater.
- Low max. 0.89 US gallons of water usage per rack.
- Minimum 90-second cycle. (60 second wash/rinse & 30 second steam evacuation)
- 40 racks per hour (based on 90-second cycle).
- Fully automatic cycle for easy operation.
- Water level safety control.
- Maximum clearance for dishes is 27".
- All Stainless Steel construction.
- Wash tank screens, which filter recirculating wash water, prevent soil from entering spray arms.
- 3-door feature for straight or corner applications.
- Automatic heat exchange condenser wash-down feature.
- Rinse PRV supplied (Pressure Regulating Valve).
- Field convertible from three phase to single phase.
- Simple, rugged durability that you expect from CMA.
- Door Safety Interlock System (DSI) assures that doors remain locked throughout the entire cycle, allowing the HR system to evacuate the vapor from the machine.

The "Ventless" option is a Heat Recovery Condensation Removal System:

Captures and distributes normally exhausted heat from the wash/rinse tank, using this FREE energy to pre-heat cold water prior to feeding the booster heater. Water entering the booster heater has been pre-heated, reducing the energy cost to bring booster temperature to required 180 degrees, potentially saving THOUSANDS of \$ in operational costs.

NO VENT HOOD REQUIRED: Saves THOUSANDS \$ on installation.

**CMA
MIZER®**
Registered Trademark






CMA-180-VL TALL

High Temperature
3- Door Single Rack
Dishwasher

WARNING: Plumbing connections must be made by a qualified service company who will comply with all available Federal, State, and Local Health, Plumbing and Safety codes.

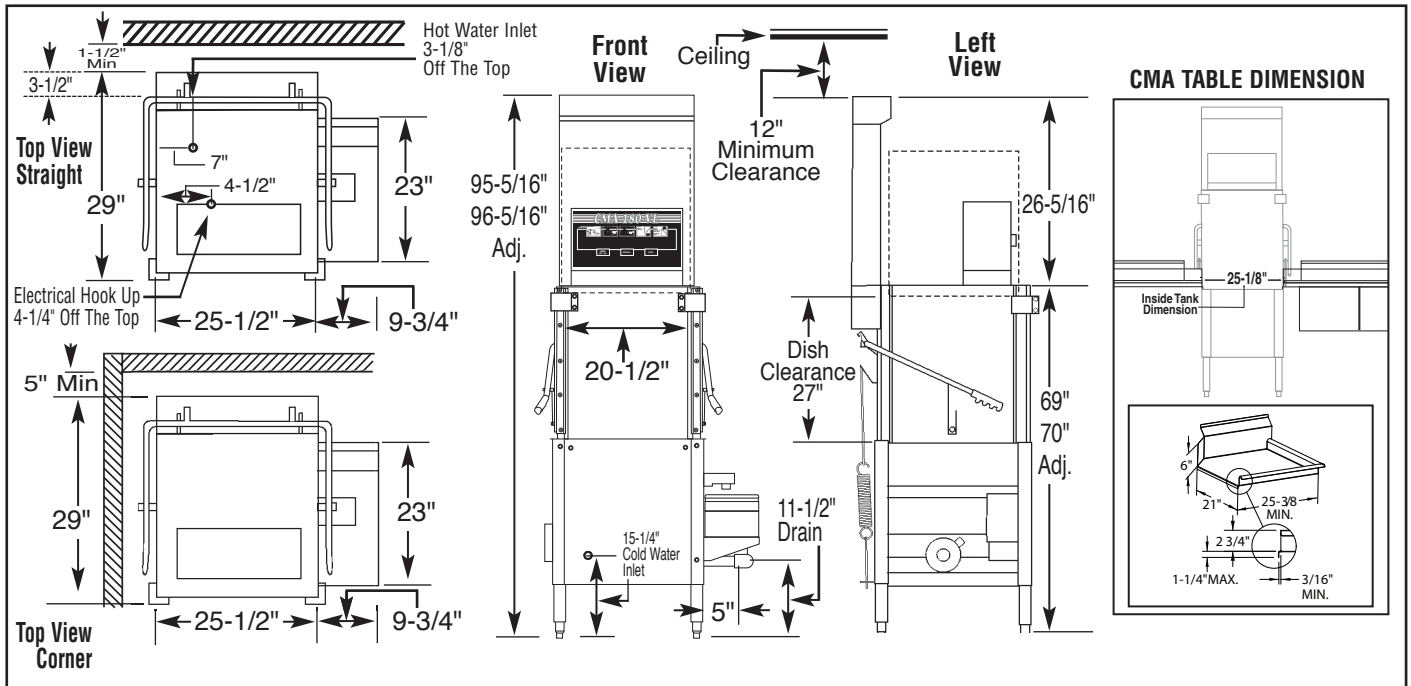

Specifications:

	USA	METRIC		USA	METRIC	
WATER CONSUMPTION			WASH PUMP MOTOR HP	1	1	
PER RACK (MAX)	.89 GAL	(3.37 L)	DIMENSIONS			
PER HOUR	52 GPH	(197 L)	DEPTH	29"	(76.7cm)	
OPERATING CYCLE			WIDTH (OUTSIDE DIMENSION)	25 -1/2"	(65cm)	
WASH TIME - SEC.	49	49	HEIGHT	95-5/16"-96-5/16"	(242-244.6cm)	
RINSE TIME - SEC.	12	12	STANDARD TABLE HEIGHT	34"	(86.3cm)	
STEAM EVACUATION	41	41	MAX CLEARANCE FOR DISHES	27"	(68.6cm)	
TOTAL CYCLE	90	90	DRAIN CONNECTION (OFF FLOOR)	11-1/2"-12-1/2"	(29-32cm)	
OPERATING CAPACITY			STANDARD DISHRACK	1	1	
RACKS PER HOUR	40	40	DIMENSIONS	19-3/4" X 19-3/4"	(50X50cm)	
WASH TANK CAPACITY	8 GAL.	(30.3 L)	ELECTRICAL RATING	VOLTS	PHASE	AMPS
PUMP CAPACITY	52 GPM	(197 LPM)	INCLUDES	208	1	78
WATER REQUIREMENTS			REQUIRED 12kW	240	1	88
COLD WATER	41-65°F	(5°C-18°C)	BOOSTER	208	3	49
HOT WATER	120°F-140°F	(49°C - 60°C)		240	3	55
DRAIN CONNECTION	2"	(5.1cm)		480	3	25
RINSE PRESSURE SET	20 ± 5psi	(1.41 kg/cm ²)	APPROXIMATE SHIPPING WEIGHT			
HOT WATER INLET	1/2"	(1.3cm)		520#		(235.6kg)
COLD WATER INLET	1/2"	(1.3cm)				
OPERATING TEMPERATURE						
WASH-°F (MIN)	155°F-160°F	(68°C-71°C)				
RINSE-°F (MIN)	180°F-195°F	(82°C-90°C)				

Summary Specifications: Model CMA-180-VL

The model CMA-180-VL single tank, high temperature dishwasher is designed for years of trouble free service, producing sparkling results while conserving energy, water and chemicals. This machine is supplied with a built-in 12 kW booster heater required for "Ventless" feature to function. The CMA-180-VL comes standard with the 3-door feature for straight or corner applications. Unique soil purging system filters wash water and plate debris into an external tray. The CMA-180-VL is NSF, UL, CUL and CE approved. Constructed entirely of stainless steel.

