


CAUTION
 TWO SOURCE
 220V 20 AMP
 220V 60 AMP

CMA-44 CONVEYOR
 208/220/240V
 SINGLE PHASE
 TWO SOURCE

CUT OFF POWER BEFORE SERVICING

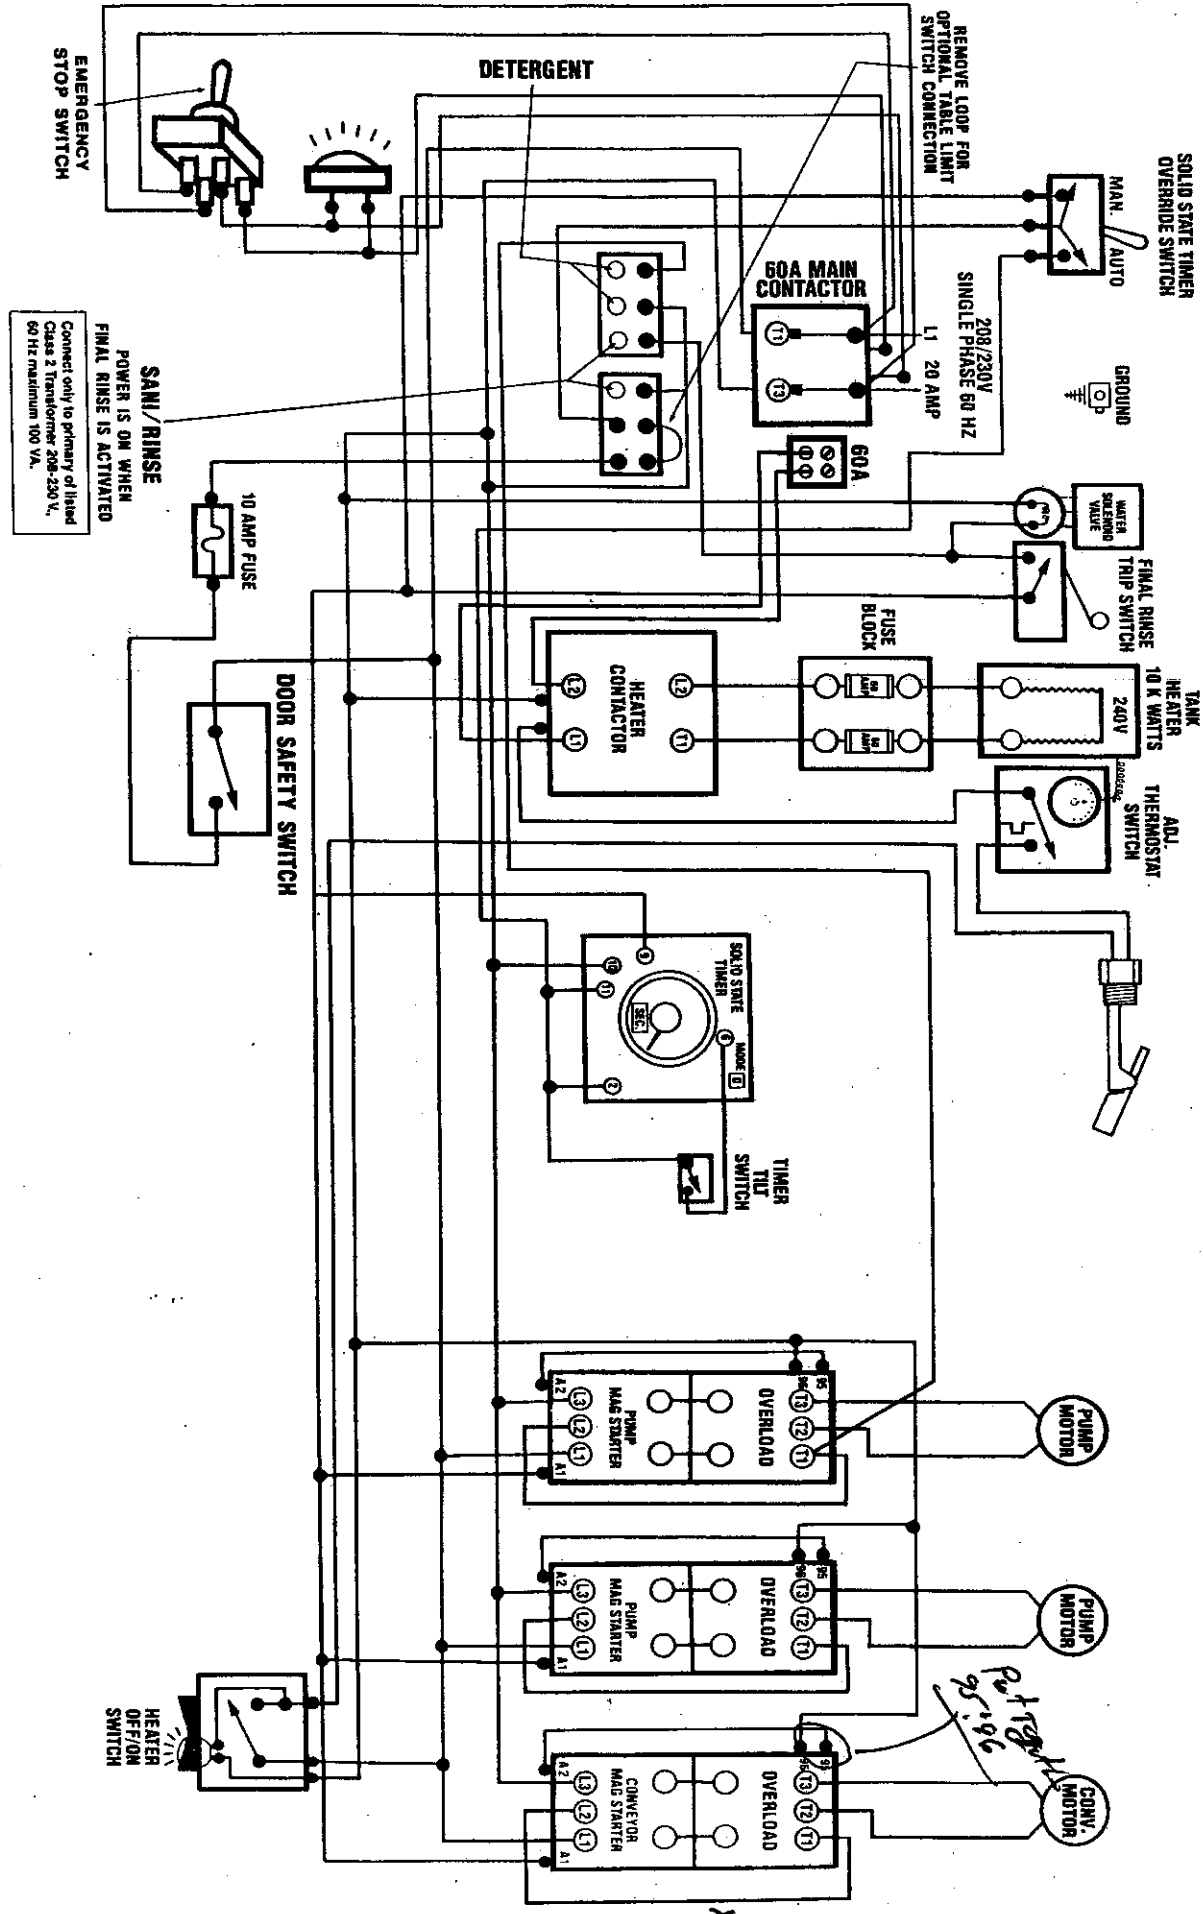

EMERGENCY STOP SWITCH

DETERGENT

60A MAIN CONTACTOR

REMOVE LOOP FOR OPTIONAL TABLE LIMIT SWITCH CONNECTION

208/230V SINGLE PHASE 60 HZ L1 20 AMP

GROUND

SOLID STATE TIMER OVERRIDE SWITCH

WATER SOLENOID VALVE

FINAL RINSE TRIP SWITCH

TANK HEATER 10 K WATTS 240V

ADJ. THERMOSTAT SWITCH

FUSE BLOCK

HEATER CONTACTOR

10 AMP FUSE

DOOR SAFETY SWITCH

SOLID STATE TIMER

TIMER TILT SWITCH

PUMP MOTOR

PUMP MOTOR

CONV. MOTOR

HEATER OFF/ON SWITCH

SANI/RINSE POWER IS ON WHEN FINAL RINSE IS ACTIVATED

Connect only to primary of listed Class 2 Transformer 208-230V, 60 HZ maximum 100 VA.

yellow

9/18/96