




Installation & Operation

EST Conveyor Machines
Drain Water Tempering Kit
PN13475.03 Factory Installed
PN13476.03 Field Installed

Drain Water Tempering Kit - Initial Installation Instructions

1. Machine ships with CMA Drain Water Tempering (DWT) valve Assembly NOT installed. Installer to install the DWT assembly in the drain line between the machine and floor sink.
2. Example of DWT attached to left or right side of the drain manifold. Always install closest to floor sink.

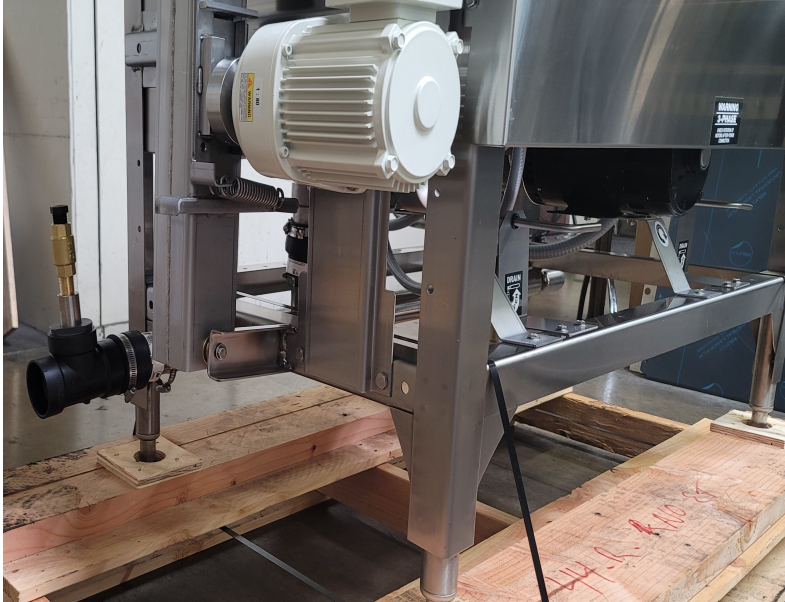

2. Attached to left side of Drain Manifold



2. Attached to right side of Drain Manifold



3. Remove black plug.
4. Connect cold water line to the in-line check valve. Installer responsible for water connection. Cold water connections not supplied by CMA Dishmachines.
5. Turn on cold water and check for leaks.

EST-66 Drain Water Tempering Assembly

Drain Water Tempering Valve Assembly (Effective 03-2023)

PN13475.03 Factory Installed Kit

PN13476.03 Field Installed Kit

