



Installation & Operation

Drain Water Tempering Kit
UC50e

PN13475.04 New machine order

PN13476.04 Field Install order

Drain Water Tempering Kit - Initial Installation Instructions

1. Machine ships with Drain Water Tempering Kit inside the machine. Installer must attach the Drain Water Tempering kit as shown below.




2. Remove black plug and attach cold water line. Drain Water Tempering assembly must be no higher than 12" from the floor.



Parts Manual

Drain Water Tempering Valve Assembly (Effective 12-2023) PN13475.04 Factory Installed Kit PN13475.04 Field Installed Kit

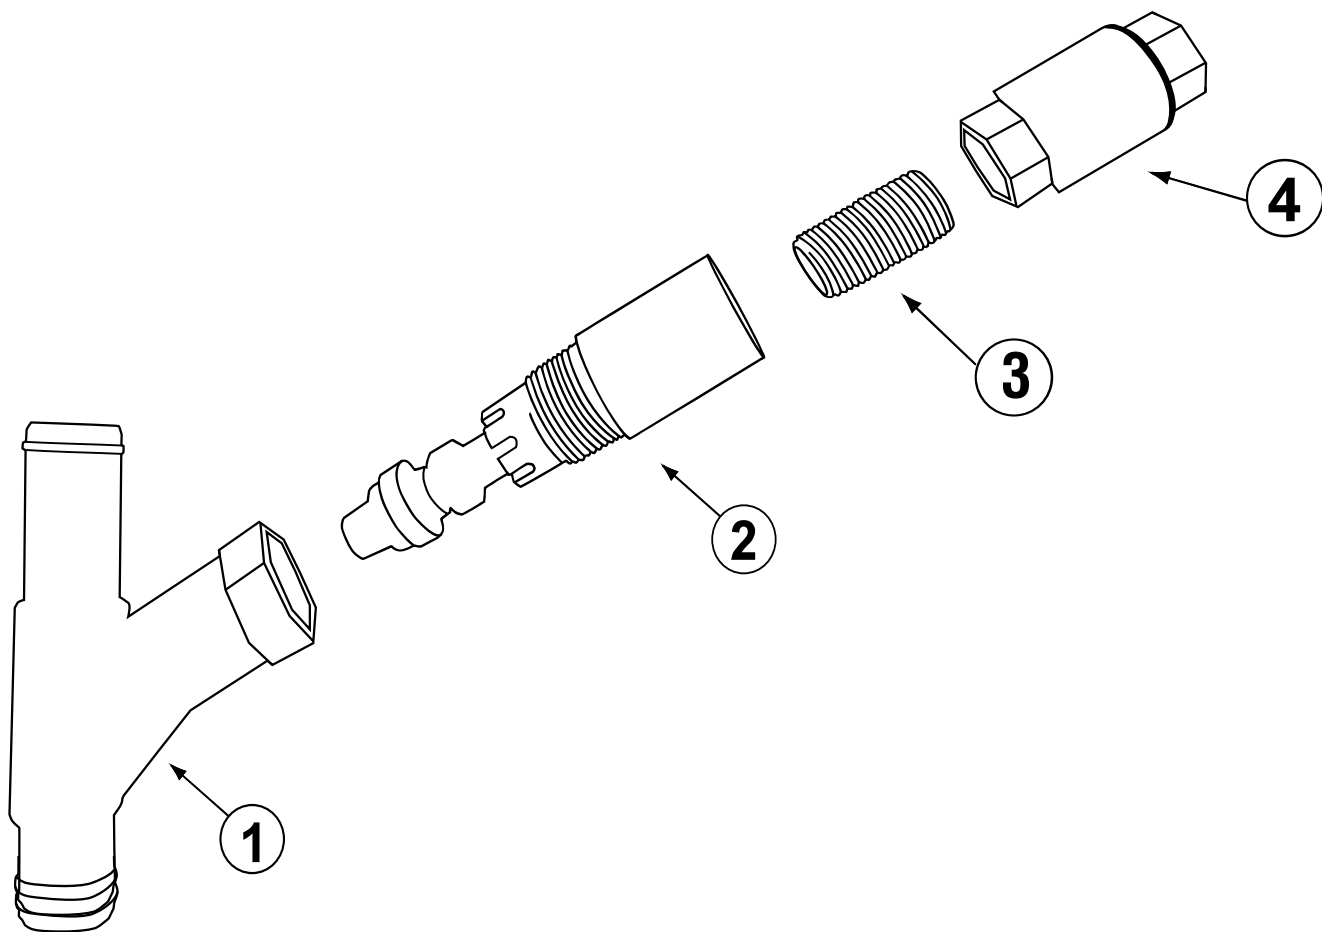

ITEM NO.	NO. REQ'D	P/N	DESCRIPTION
1	1	13470.86	DTV "Y" fitting
2	1	13470.85	Drain Water Tempering Valve
3	2	00742.00	Nipple Brass 1/2 x 1 1/2
4	1	00715.00	1/2 Ball Check Valve